

A dark teal hexagonal logo containing the text 'Decor Dreams' in a large, white, serif font, with 'LMT Walls' in a smaller, white, sans-serif font below it.

**Decor  
Dreams®**  
LMT Walls

## WALL COVERING SELF-ADHESIVE

## INSTALLATION GUIDE

COMPLEMENTS

FAQS

WARRANTY CONDITIONS

RECOMMENDATIONS FOR MAINTENANCE



# COMPLEMENTS

In DecorDreams thought in everything and we also have the necessary primer to prepare the Surface where our product will be installed. Get a better adherence and resistant of the covering once they are installed, guarantying the full warranty established.

For very porous walls or with irregularities, little firmness, cracks, unevenness in the tiles, use our special DecorDreams adhesive to get an adequate grip for these surfaces and obtain **5 Years of Extra Warranty**.

We show the elements will help to get a perfect finish in the wall. All of the ceramic range and Wood have aluminum trims coordinated, making easy the task of having to find a complement similar to the color of the wall. The trims are 100% damp resistant and can be installed in areas exposed to it.

In our collection will find two trims; the angle trim and the end trim, thanks to the variety they are very functional. You can combine them with all of our coverings to get a different finish in your wall, make the cleaning in the joints easy, separate different material or colors, protection of the corners or only to finish the end of the covering.



## Primer

**Primer 850 ml:** (10 sqm).




## Optional adhesive

**Package 290 ml** (4sqm).

## Aluminum Angle trim

Multifunctional trim with the measures  
**15 x 15 mm x 2,7 m.**

100% Waterproof

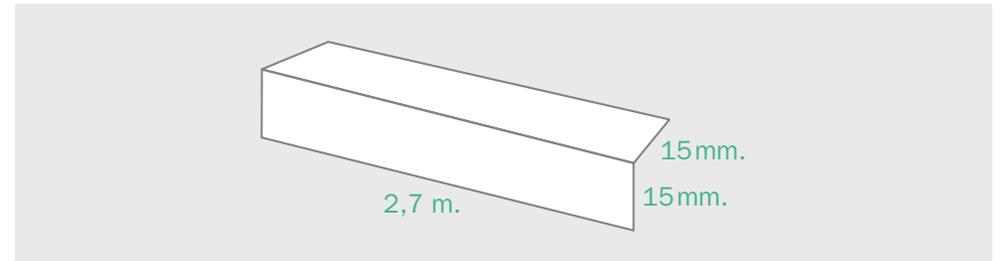

## Colors available

---



**Travertino**



**Roma**



**Venice**



**Moonlight**



**Luxor Light**



**Luxor Medium**



**Luxor Dark**



**Aluminio**



**White Antique**



**Grey Antique**





**Old Racine**

## Aluminum End trim

End trim of the tile with the measures:

**6 x 20 mm x 2 m.**

100% Waterproof

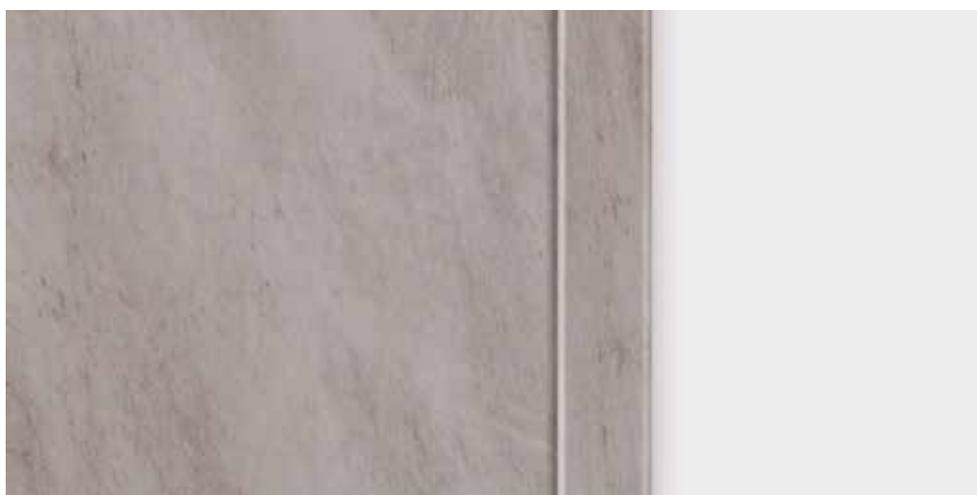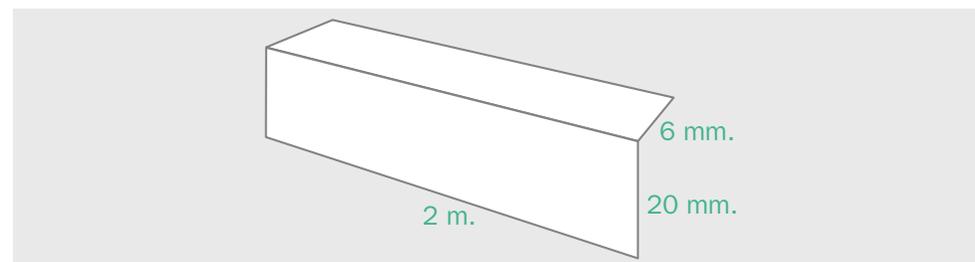

## Colors available



**Travertino**



**Roma**



**Venice**



**Moonlight**



**Luxor Light**



**Luxor Medium**



**Luxor Dark**



**Aluminio**



**White Antique**



**Grey Antique**



**Old Racine**

# NEW FIXATION SYSTEM 2.0


When the Surface to cover has characteristics which can difficult the adherence of the tiles (irregularities, half-weak, surface cracks, porosity or slope in the tiles), in an optional way, it will be possible to add an adhesive in the holes indicated to get a correct gripper.

It will be necessary for slopes bigger than 1mm between the tiles.

With the application of the wall adhesive DecorDreams, you can regulate the quantity of adhesive needed in each step to compensate the irregularities and/or cracks.



Wall with unevenness tiles

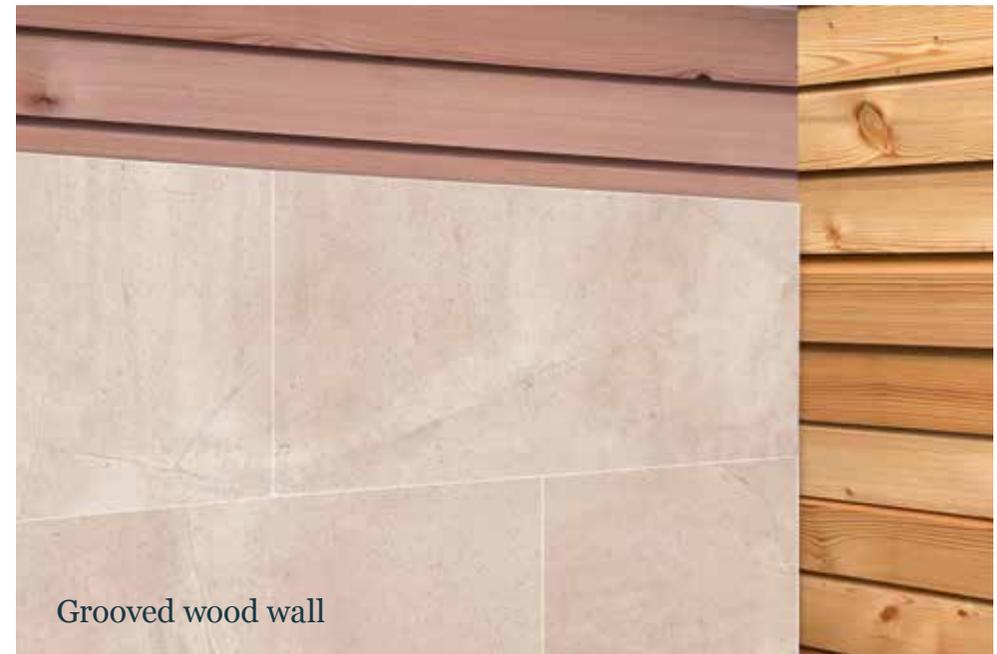

Grooved wood wall

**5** YEAR OF ADDITIONAL GUARANTEE





Brick wall



Wall with cracks



Cement wall



“Gotele” or coated wall

# INSTALLATION

DecorDreams is the definitive solution for the most exigent projects of decoration. The DecorDreams Wall Vinyl tiles are able to be installed in bathrooms, kitchens, garages, attics, rooms and in any part of the house, office or commerce.

Its exclusive fixation system allows its installation in surfaces like: plaster, plasterboard, Stone, ceramics, stoneware,...

Consult our webside

[www.mydecordreams.com](http://www.mydecordreams.com) to see our instalation video.

## Use not recommended

- Walls with continuous damp and without DecorDreams primer to solve the problem.
- Walls with plaster or weak Paint with detaches or areas with limited grip.
- Areas exposed permanently to the sunlight or heating sources as pipes, heating Systems, engineer motors...
- Areas exposed permanently to weather conditions as rain, snow, extreme cold ( $\leq 5^{\circ}$ ) or extreme hot ( $\geq 30^{\circ}$ ).
- Areas with heavy temperature changes.

- Plastic surfaces composed with PVC, methacrylate, polyurethane or plastic derivations.

More installation regulations and warranty conditions in

[www.mydecordreams.com](http://www.mydecordreams.com)

## Preparation of the Surface

The DecorDreams tiles can be installed in the following surfaces:

- Stone (conglomerate, striped, okumes tabletop, solid boards,...). It is precise to remove the rests of varnish or Paint that can be detachment once the covering has been installed. After, apply the **DecorDreams primer**.
- Plasterboard walls, applying previously the **DecorDreams Primer**.
- Metallic surfaces (aluminum, iron, steel). It is necessary to remove the rests of paints and apply, if it is necessary, an adequate primer for ferritic materials to fix the Surface.
- Plaster surfaces. It is precise apply a coating Paint or the **DecorDreams primer** previous to the installation of the covering.

- ◆ Cement or derivate bases. It is precise apply the **DecorDreams Primer for the Surface**
- ◆ Other surfaces: consult with its supplier.
- ◆ In those places where it is not necessary to apply the primer are the places with mineral tiles (ceramic, stoneware, porcelain, marble,...)

The Surface has to be clean, free of greases, dust or any sustain which can detach once the tiles are installed.

Remove the rests of the old coverings as painted paper, paints with a weak grip, varnishes,... repair, if it is necessary, the holes after rehabilitate the Surface with he aim of avoid slopes which can alter the planimetry of the Surface.

The DecorDreams tiles are flexible, but with the continuous exposition to an extreme flexions can cause the detachment once they are installed.

We recommend to keep the tiles in a horizontal position at least the 10% of the tiles for covering possible future deterioration. Important: with the aim of the correct acclimation, the DecorDreams tiles have to be out of the box in the room where will be installed at least **6 hours** before its installation.

## Assembly Instructions:

DecorDreams is an easy installation covering in comparison with other types of covering. Following correctly our installation guide, will get amazing results in a few minutes.

If you are going to perform the installation on rough, very porous walls or have doubts about the result for any other reason, we recommend installing three tiles and allowing to dry 24 hours. To check the feasibility of the installation.

During the installation process is normal to lose around the 10% of the material for the shrinkage of the cuts, so it is necessary to calculate correctly the necessary boxes for the installation.

In our web there is the section: How many boxes I need? Where we will help to buy only the necessary boxes for your walls.

Keep in mind that you only need a level ruler, a meter, pencil and cutter. (The tools are not included).

## Installation options:

There are different installation options, from the bottom (as in the video) as well as from the center of the Wall or from the top.

The temperature of the room where the DecorDreams tiles are going to be installed, has to be between **10° to 28°**.

If the installation will be done in rooms with other temperatures, the product can be dilated or contracted, appearing isolated open joints or deformed tiles.

1



Remove from the Wall the rests of dust, nails...

5



Remove the paper of the base. The tile is ready to be stack.

2



Measure the Wall and make a line with a leveler marking horizontally the center of the Wall.

6



Collocate carefully the tile, exactly in the square of  $90^\circ$  marked in the center of the Wall, pressing softly the boards to be sure that it is stack correctly.

3



Repeat the same operation making a vertical line in each Wall, obtaining a cross in both walls. The beginning of the installation in each Wall must be from the center of every cross.

If it has not stack in the correct place, remove with the help of a spatula to replace the tile and start again its correct position. Once in the definitive place, press firmly for all the area of the tile.

4



Cut with a scissor or cutter the self-adhesive tile.

7



Collocate the tiles with the same process.

8



To collocate the bottom tile, measure the center of the tile and make a small mark with pencil. Add this tile on the Wall with the pencil mark in the intersection of the two superior tiles. After that, make the same process in the top part.

12




Break the tile pressing from the center to the opposite sites of the fragment and finish the cut of the foam with the cutter.

9



Collocate the rest of the tiles on the Wall following the explained pattern.

13



To collocate the fragments of the top and the bottom of the Wall, measure one per one the dimensions of the tile and cut following the process explained in the other sections.

10



When you arrive at the end of the Wall, measure with a ruler the distance from the last tile in the Wall and mark the tile you will cut.

14



Dismantle, if it is required, light switches, complements, etc and replace again once the covering is installed.

11



To collocate the tile, mark with a pencil the cut line. Collocate on the line, a square or metallic ruler and pass softly the cutter over the mark once.

15



The pipes and other obstacles are easy to avoid making a previous measurement to add correctly in the tile before its installation.

16



Get a perfect finish with our trims especially for the end of the tile and the corners.

17



After the installation you will be able to drill without any problem to put on the Wall all the complements you want.

## Installation in shower areas

When you want to install our product in shower areas, you may proceed in the following way:

In this case we have to start from the bottom of the Wall, being sure that it is well-leveled and once the first tile will be stack, it is necessary to apply a small line of transparent and anti-mold silicon in all the area of the first tile, before the installation of the followings and remove the rests of silicon with your finger wet in soapy water or with a soapy cloth.

You should repeat this process in all the tiles (only in areas where the water can be on the tiles).

If you use the aluminum DecorDreams trims in any position, be sure to reseal with the same product, the possible water filtration areas.

See the process in the installation video for Shower Areas  
[www.decor dreams.es/videos/](http://www.decor dreams.es/videos/)

# FAQ – FREQUENT QUESTIONS FOR KITCHENS

## **It can be installed directly on ceramic tiles?**

Yes, one of the advantages of DecorDreams is its adaptation to any surface. Its fixing system allows fixing it at the moment to almost all the surfaces. The installation on ceramic tiles it is only necessary to keep the wall clean without grease or paint before stick it.

## **Leave residues on the wall once it is removed?**

Our fixing self-adhesive fixing is developed in order to be repositioned in the case it has not been installed correctly, but also can be removed from the wall without any rests of the product leaving the wall like before installing the product.

## **How can I clean it?**

The tiles DecorDreams are easy to clean. It is recommendable the use of neutral soap or soap solution without abrasive products as ammonia, bleach, etc.

## **Is it fireproof?**

The mineral vinyl wall tiles DecorDreams have a classification CS2 do. This result certify that in case of fire, the tiles will have a fire behavior inside the current regulations of construction. This means that the tiles are certified that they are already complying with the European Rule EN13823:2012. If you want to install our tiles in an office, shop or commerce or public local, consult with your architect or engineer about the required classification in each case.

# FAQ – FREQUENT QUESTIONS FOR BATHROOM AND COMMERCE

## **Can it be installed in the shower?**

Yes, DecorDreams is 100% water resistant and it is guaranteed for damp areas as the shower. It is always recommended that the installation stay totally fixed in order to avoid future water filtrations through the behind of the wall. For this reason is recommended apply translucent silicon in all the perimeters of the tile during the installation process of each tile. You can see the process in our installation video guide.

## **What I have to do for its installation?**

Our self-adhesive system is developed in order to make the product able to be repositioned in case it had been installed incorrectly. It also can be removed from the wall leaving it completely clean without any dust.

## **Can it be installed directly on ceramic tiles?**

Yes, one of the advantages of DecorDreams is its adaptation to any surface. Its fixing system allows fixing it at the moment to almost all the surfaces. The installation on ceramic tiles it is only necessary to keep the wall clean without grease or paint before sticking it. In the case the wall has some area to cover, it is necessary to apply previously the PRIMER DecorDreams.

## **Leave dust in the wall?**

Our fixing self-adhesive system is developed in order to be repositioned in the case it has not been installed correctly, but also can be removed from the wall without any residue of the product leaving the wall like before installing the product. The residue of the material once it is taken off can leave some residue of the minerals or pull the area.

# FAQ – FREQUENT QUESTIONS FOR COMMERCE

## **Is it fireproof and able for commercial installations?**

The mineral vinyl wall tiles DecorDreams have a classification CS2 do. This result certifies that in case of fire, the tiles will have a fire behavior inside the current regulations of construction. This means that the tiles are certified that they are already complying with the European Rule EN13823:2012. If you want to install our tiles in an office, shop or commerce or public local, consult with your architect or engineer about the required classification in each case.

## **How can I clean it?**

The tiles DecorDreams are easy to clean. It is recommendable the use of neutral soap or soap solution without abrasive products as ammonia, bleach, etc.

## **Leave residues on the wall once it is removed?**

Our fixing self-adhesive fixing is developed in order to be repositioned in the case it has not been installed correctly, but also can be removed from the wall without any rests of the product leaving the wall like before installing the product.

## **Has to be protected from the sunlight?**

Is better that if the installation is exposed to the sun throw the window, it can make produce the magnifying glass effect and general high temperatures which can detach the product, so it will be necessary some protection to avoid the negative effects in the product.

# FAQ – FREQUENT QUESTIONS FOR OTHER AREAS

## **Can be installed on plaster, cement, wood, stippled paint or coated?**

For installing the vinyl wall tiles DecorDreams on plaster or coated wall is necessary to follow the advises:

Before installing we have to be sure that the walls are free of damp, greases or recesses which can affect the perfect adherence of the tiles.

It is not recommended its installation on unevenness superiors to 5mm per lineal meter.

It is **mandatory** apply the **PRIMER** DecorDreams on the walls when it is installed on coated, plaster, cement, wood or laminated or any porous surface in order for the guarantee to apply.

If you want to install it on coated with high porous, sand the drops of the coated to get a regular level on the wall no superior to 2 mm.

## **Can be changed one piece in case it is broken or has any imperfection?**

Yes, the tiles can be changed easily. The estimated time for changing one piece is about 10 minutes. For the change, it is recommended the introduction of a spatula in the joint between bevels and separate the tiles slowly from the wall. It is normal that some part of the leveling foam stay adhesive to the wall if it has not been installed correctly. This can be removed scratching with a spatula.

## **Can it be installed by myself?**

The wall covering DecorDreams are easy to install, you just need some basic tools. We recommend to read the installation instructions or see the installation video guide to understand how to install the product.

# FAQ – FREQUENT QUESTIONS FOR OTHER AREAS

## **Is it fireproof?**

The mineral vinyl wall tiles DecorDreams have a classification CS2 do. This result certify that in case of fire, the tiles will have a fire behavior inside the current regulations of construction. This means that the tiles are certified that they are already complying with the European Rule EN13823:2012. If you want to install our tiles in an office, shop or commerce or public local, consult with your architect or engineer about the required classification in each case.

## **Is able to place tiles near heating sources?**

Where the tiles will be installed near heating sources that can affect directly the tiles like stoves, it is advisable avoid the direct exposition throw refractory glasses or separator aluminum plates. In this way, the heat will not affect the surface of the product, however the direct flame will affect blacken the affected zone by the fire but not expanding the fire. In the kitchen area, whenever vitro-ceramic or induction, it will not be necessary whenever not to put near hot utensils.

## **Have the tiles thermal and sound insulation?**

Without any doubt once the product will be installed you will note a thermic insulation. Compared with a ceramic tile, the DecorDreams tiles offers a hot and warm pleasant handle. Other advantage is the improvement in sound insulation, it optimizes the acoustic bars of the wall where will be installed.

# WARRANTY CONDITIONS

Dear customer, thank you for choosing a vinyl covering DecorDreams. We wish that with our product give an excellent result for many years. In the following document you will find described the warranty conditions when you add a covering of our Brand. In this conditions are all the rights according with the lay 23/2003, 10th July about Warranties in Sales of Consumer Goods, as well as the warranty and the additional rights that DecorDreams offer. Read with attention the document Installation Guide where you will find detailed all the questions related with the parameters and rules of installations following the European legislation.

## **Which is the coverage of this warranty?**

This warranty coverage the defects in the materials related with stains, discoloration, wear resistance and local humidity. The customer has to abstend of install the defective tiles and inform about the visible defects between 8 days from the day of the purchase. After that period, claims will be not accepted. The warranty will not apply in products which its installation have not done following the installation instructions explained in the Installation Guide.

## **Unalterable to sunlight**

The DecorDreams Wall covering is resistant to the sun and artificial light keeping its original aspect during the years without any variation.

## **Resistance to stains**

The DecorDreams wallcovering resists stains of common products in homes such as oil, wine, chocolate ...

If you are going to place the plates in areas where they are subjected to contact with abrasive chemicals, consult your dealer about the use in these types of installations.

## **Spot resistance**

The DecorDreams coting is resistant to the spots by natural use conditions. Is able for bathrooms, kitchens and areas with a high humidity. Its structure will keep unalterable. In areas with a high humidity potential is recommended the use of an acetic silicone sealant with the aim of avoiding filtrations to the adjacent walls.

**Important:** This process no offers a sealing function. Before its installation revise correctly the defects or cracks in the area where the product will be installed and add, if it is necessary, a special primer for humidifies in case that the areas requires sealing.

## Coverage period

This warranty is for the lifetime of the product. The warranty is for the final consumer and it is not transferable. To have the right of use the warranty will be considered that the product is summited an annual depreciation due to its wear and tear, based in the following percentages calculated from the purchase date: 1/8 annual in commercial use – 1/25 annual in domestic use.

## Validation of warranty

Keep the invoice during all the coverage period of the warranty. The invoice have to be complimented correctly with the correct details of the seller and buyer and the stamp of the stablishment. In case you have to make any claim, you may do it through the store where you acquired the product.

## What is not covered by the warranty?

This warranty does not cover the damage on the product in the following situations:

Error of installation or an installation in a different way from the stipulated in the Installation guide, accident, bad use or abuse of the product, as scratch, blows, cuts or damage by aggressive agents, originals for the contracting, Service Company or the customer, keeping in an inadequate way the tiles, still water, water penetrated between the base and the DecorDreams tiles.

Is recommended the use of expansion margins for walls with bigger dimensions of 5m large x 3m height. In this cases, just leaving a space of 3 – 5 mm between a tiles columns to keep going with the installation. A putty can be used for elastic joints to fill the expansion margins. The warranty does not cover damages clearly visible, as signs of wear on the Surface, spots or decoloring inferior to 1cm<sup>3</sup>. If it is a partial detachment of a tile, the warranty only is available if the tile is detached completely and its stick was not possible through the adhesive DecorDreams glue.

The fabricant is not responsible for the cost of work, installation or related costs with the change or reparation of the tiles. Therefore, the special costs are not covered in the present warranty. The fabricant exclude specifically from the warranty any damage aforementioned and its respective payment. It is included in its damages any lost and its respective costs.

# RECOMMENDATIONS FOR ITS MAINTENANCE

With the aim to protect the DecorDreams Wall covering, it is recommended the following:

- ◆ Consult the distributor if the product will be collocated in areas which appears as no recommended..
- ◆ Avoid submit the product to extreme temperatures and the continuous sunlight's.
- ◆ Do not collocate the product in open areas where the sun or the rain can be in contact.
- ◆ Keep an indoor relative humidity between the 40% and the 60% all the year to avoid that the covering suffer sudden temperature and humidity changes.
- ◆ Keep the temperature in the installation area between 16°C and 22°C to avoid the expanding or shrinkage of the tiles.

- ◆ The Surface of the DecorDreams Wall covering is essentially resistant and lasting, it is no required additional treatments.
- ◆ The product is not necessary to be polished, varnished or waxed due to it conserve without any additional treatment its intrinsic and essential properties.
- ◆ Do not use an abrasive product or with compositions like ammonia, dissolvent or other aggressive agents. The use of other cleansings can alter the properties of the product as the shine or the color. In case to use another cleaner, make a preventive test in some part with low visibility.

DecorDreams reserves the rights to not accept the present letter of warranty if it is considered the fact of no have followed the rules in the present document, as rectify, cancel or add any annex of the present warranty with any prior notice.

# Decor Dreams®

LMT Walls

contacto@mydecordreams.com  
www.mydecordreams.com



DecorDreams es una marca registrada por  
**Euro Trade Flooring S.L.**  
Galileo, 11, Pol. Ind. Can Estella  
08635 Sant Esteve Sesrovires  
Barcelona (España)

