


## TECHNIC INFORMATION

	RANGE 40x80 CM	RANGE 30,5x61 CM
MEASURES	400 x 800 mm	305 x 610 mm
TOTAL THICKNESS	6,8 mm	6,8 mm
MINERAL CORE THICKNESS/DENSITY	4 mm thickness/1000kg/CBM	4 mm thickness/1000 Kg/CBM
TILES/BOX	6	10
SQM/BOX	1,92 SQM	1,86 SQM
BEVEL	4 SIZE BEVEL	4 SIZE BEVEL
COLOUR FASTNESS TO LIGHT ISO 105 B02:2014	6	6
DIMENSIONAL STABILITY ISO 23999:2012	0,10 %	0,10 %
EXPANSION IN TEMPERATURE CHANGE FROM 23°C TO 45°C	0,010 %	0,010 %
SHRINKAGE IN TEMPERATURE CHANGE FROM 23°C TO 5°C	-0,047 %	-0,047 %
CURLING AFTER HEAT EXPOSURE ISO23999:2012	0 mm	0 mm
FIRE BEHAVIOUR UNE-EN 13823:2012	C-S2,D0	C-S2,D0
RANGE OF SUPPORTED TEMPERATURE	5°/30°	5°/30°
FORMALDEHYDE EMISSIONS EN717-1:2004	PASS	PASS
SWELLING IN THICKNESS AFTER IMMERSION IN WATER EN317:1994	1%	1%
DETERMINATION OF RESIDUAL INDENTATION EN ISO24343-1	0,04 mm	0,04 mm
VOC EMISSION TESTING ISO:16000/3,6,9,11	A+	A+
DOMESTIC USE WARRANTY*	12	12
COMMERCIAL USE WARRANTY	6	6


### Range 30.5x61 cm

Tiles per box: 10 tiles  
SQM per box: 1.86 sqm




### Range 40x80 cm

Tiles per box: 6 tiles  
SQM per box: 1.92 sqm

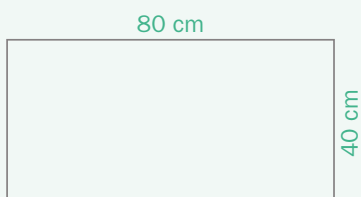

- 1 LVT
- 2 Mineral core
- 3 Techno Fix Foam

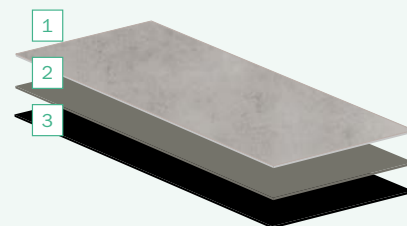

Tile thickness: 6.8 mm



4 sizes painted bevel

\*Read carefully the Warranty Conditions and the Installation Guide.

